

SELF-INFLATING LIGHTING BALLOON

Sirocco 2-M 6x 100W LED






IDENTIFY of the series of the

SELF-INFLATING LIGHTING BALLOON








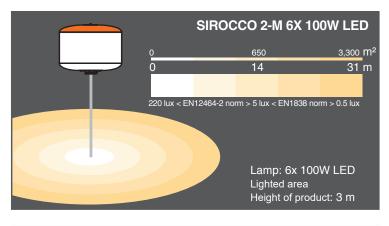

90 cm		SIONS & PACKAGING	
160 cm - 530 cm - 28 c		m	
	BLACK PVC CYLINDER (INTEGRATED HANDLE)		
	Total weight (without stand)	15 kg	
165 cm	Net weight ballon only	12 kg	

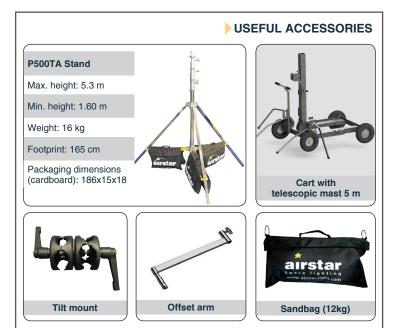

TECHNICAL DATA

Lamps	6x 100w LED		
Average lamps life*	50,000 hours		
Efficiency	100 lm/W		
Type of Lamp Socket	6 x Blocks [Driver + LED] independent Fast and easy to replace (4 screws)		
Maximum power	600 W		
Available voltages	100~240v / 50 Hz		
Restrike time Inst			
Main power supply or 1kVA generator			
Envelope diameter	90 cm		
Envelope height	60 cm		
Envelope options: multiple envelope colors, without reflector, reverse reflector			
* I Inder normal conditions of use			

* Under normal conditions of use

LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	3,300 m²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	650 m²
Light under the balloon (3m height)	500 lux
Maximum lumen	60,000 lm
Color temperature: DAYLIGHT	6,000°K

SAFETY

Flame-retardant fabric	
Silver reflector to improve illumination under balloon and avoid ligh pollution	t
Rain and dust proof material	IP54
Maximum ambient temperature	45°C
Integrated fuse protection + breaker and pressure sensor	
Wind Resistance	100km/h

PACKAGE INCLUDES

Full set lighting balloon with 6 LEDs, repair patch kit, user manual, 1 glove in a black PVC cylinder case

www.airstar-light.com